

TECHNICAL DATA

Fluke 405, 408 and 410

Laser Distance Meter




Product Overview

Just point and click to instantly measure up to 100 meters, new Fluke Laser Distance Meters are fast, accurate, durable, and easy to use.

These Laser Distance Meters have the Fluke's core value you expected. The simple design and easy-to-use button operation allow you to operate with one hand, minimize the time spent in measuring, also maximize the reliability of measurements.

Features and benefits

- Quickly measure distance, calculate area / volume / pythagoras
- Auto level and height
- Built to withstand rainy or dusty conditions : 1-meter drop tested with rated IP64 (FLUKE 405 / 408 / 410),
- Electronic angle display, auxiliary level measurement
- Up to 100 sets of data storage
- The battery life up to 3500 single measurements
- Automatically power off after 3 minutes of inactivity

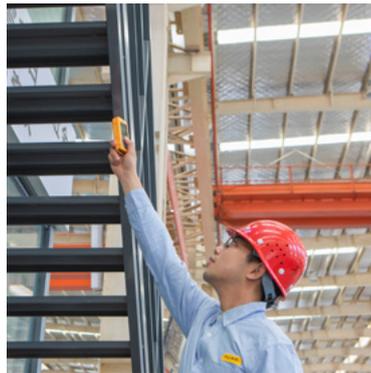

FLUKE 405 / 408 / 410 provide additional features as:

- Universal tripod interface, easy to use
- Type-C charging port, strong endurance
- 2-inch HD display, clear viewing in full sunlight



Specifications



	Fluke 405	Fluke 408	Fluke 410
Specifications			
Range	0.2 to 50 m	0.2 to 80 m	0.2 to 100 m
Accuracy* In favorable condition**	±(2.0mm+5x10 ⁻⁵ D)		
Accuracy In unfavorable condition***	±(3.0mm+29x10 ⁻⁵ D)		
Angle accuracy	±(0.3°+0.1°+0.01°*A), A is up to ±45° in each quadrant		
Angel measurement method	Electronic		
Measurement unit	m / ft / in / ft+in		
Display	2.0-inch positive display		
Measurements			
Single measurement	●	●	●
Continuous measurement	●	●	●
Area measurement	●	●	●
Volume measurement	●	●	●
Auto Level	●	●	●
Auto Height	●	●	●
Pythagoras 2-point	●	●	●
Pythagoras 3-point	●	●	●
Add / Substrate Method	●	●	●
Measurement reference	Front / Tripod hole / Back / Extender		
Auto-off	3 minutes after inactivity		
Data Storage	100 sets		
Time-delay measurement	●	●	●
Auto calibration	●	●	●
Side button	●	●	●
Extender	●	●	●
General			
Laser class	Class 2		
Laser type	630 to 670nm, <1mW		
Battery life	up to 3500 measurements (single measurement)		
Operating temperature	0 °C to 40 °C		
Storage temperature	-10°C to 60°C		
Ingress protection	IP65		
Drop test	1 m		
Size	52 mm × 116mm × 28mm		
Weight	110g		

* Temperature for specified accuracy is 25°C

** Favorable conditions: white and diffuse reflection objects (white painted walls) ,low background illumination and moderate temperature

*** Unfavorable conditions: objects with low or high reflectivity, high background illumination or the temperature is at the upper or lower limit of the specific temperature range



Fluke 405

Fluke 408

Fluke 410

	Fluke 405	Fluke 408	Fluke 410
Certification			
Laser certification	IEC 60825-1: Class 2, 635 nm, < 1 mW CPA, CE		
Electrical certification	IEC 61010-1: Pollution Degree 2 EMC: IEC 61326-1: Industrial Electromagnetic Environment CISPR 11: Group 1, Class A		
Certification			
Packaging box	Full telescope	Full telescope	Full telescope
User manual	√	√	√
Vinyl carrying pouch	√	√	√
Battery	2 AAA NiMH re-chargeable cells	2 AAA NiMH re-chargeable cells	2 AAA NiMH re-chargeable cells
Qualification certificate	√	√	√
Lanyard	√	√	√
Charging cable	Type-C cable, 0.5m	Type-C cable, 0.5m	Type-C cable, 0.5m

Fluke. *Keeping your world up and running.®*

© 2021 Fluke Corporation. 5/2021
specifications subject to change without notice.